


Boost up Your Certification Score

Dell EMC

D-PEXE-OE-00

Dell Technologies PowerEdge XE Operate

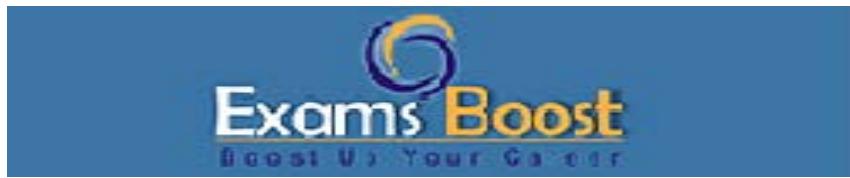

For More Information – Visit link below:

<https://www.examsboost.com/>

Product Version

- ✓ Up to Date products, reliable and verified.
- ✓ Questions and Answers in PDF Format.

Latest Version: 6.0

Question: 1

What should be done after modifying cluster configurations to support additional nodes?

- A. Replace existing nodes
- B. Disable monitoring tools
- C. Increase security restrictions immediately
- D. Validate changes through testing

Answer: D

Question: 2

Which actions are REQUIRED to successfully integrate GPU nodes into an existing PowerEdge XE architecture?

(Choose two)

- A. Confirm cluster configuration alignment
- B. Validate GPU compatibility
- C. Disable firmware checks
- D. Increase network latency thresholds

Answer: A,B

Question: 3

Which logs should be reviewed to identify node boot failures?

- A. Billing logs
- B. Application workload logs
- C. Documentation change history
- D. System and boot logs

Answer: D

Question: 4

Which sign MOST clearly indicates an emerging hardware issue?

- A. Reduced monitoring data
- B. Repeated warning alerts
- C. Updated firmware inventory
- D. Stable utilization metrics

Answer: B

Question: 5

Why should node readiness be verified using both iDRAC and cluster tools?

- A. To reduce administrative overhead
- B. To confirm both hardware and logical integration
- C. To meet security compliance only
- D. To avoid firmware baselines

Answer: B

Question: 6

Why is testing important after adding new nodes to a PowerEdge XE cluster?

- A. To validate performance and stability
- B. To update documentation
- C. To reduce monitoring overhead
- D. To confirm firmware baselines only

Answer: A

Question: 7

Which practices improve monitoring effectiveness?

(Choose two)

- A. Suppressing warning notifications
- B. Correlating metrics over time
- C. Disabling dashboards
- D. Reviewing alerts consistently

Answer: B,D

Question: 8

Which factors should be considered when defining security measures?
(Choose two)

- A. Workload sensitivity
- B. Documentation format
- C. Customer policies
- D. Billing cycles

Answer: A,C

Question: 9

When should log files be sent to TechDirect?

- A. After every firmware update
- B. During routine monitoring
- C. Before running diagnostics
- D. When escalating unresolved issues

Answer: D

Question: 10

What is the FIRST step when investigating an unexpected node failure?

- A. Access system logs
- B. Disable cluster monitoring
- C. Replace the node immediately
- D. Reinstall firmware

Answer: A

Thank You for Trying Our Product

For More Information – **Visit link below:**

<https://www.examsboost.com/>

15 USD Discount Coupon Code:

G74JA8UF

FEATURES

- ✓ **90 Days Free Updates**
- ✓ **Money Back Pass Guarantee**
- ✓ **Instant Download or Email Attachment**
- ✓ **24/7 Live Chat Support**
- ✓ **PDF file could be used at any Platform**
- ✓ **50,000 Happy Customer**

