

Boost up Your Certification Score

Cisco 350-601

**Implementing and Operating Cisco Data Center Core
Technologies**



For More Information – Visit link below:

<https://www.examsboost.com/>

Product Version

- ✓ **Up to Date products, reliable and verified.**
- ✓ **Questions and Answers in PDF Format.**

Latest Version: 36.3

Question: 1

The Cisco UCS blade chassis must send SNMPv3 traps to a network monitoring system. The SNMP trap messages should be authenticated and have protection from closure. Which SNMP security privileged level should be configured?

- A. noPriv
- B. auth
- C. noAuth
- D. priv

Answer: D

Question: 2

What is the DHCP snooping bindings file shown here used for by the Cisco Nexus 9000 Series Switch?

```
3ebe1518
TYPE DHCP-SNOOPING
VERSION 1
BEGIN
1.1.1.1 512 0001.0001.0005 3EBE2881 Gi1/1 381e06dd02
1.1.1.1 512 0001.0001.0002 3EBE2881 Gi1/1 01c1819c9f
1.1.1.1 1536 0001.0001.0004 3EBE2881 Gi1/1 9ab3e4416e
1.1.1.1 0484 0001.0001.0008 2EBE2281 Gi1/1 40032733f0
1.1.1.1 1 0001.0001.0001 3EBE2881 Gi1/1 23cfc94db4
```

- A. to retain the DHCP bindings configuration across reboots
- B. to authenticate the users permitted to make the changes to the DHCP snooping feature
- C. to retain the DHCP server configuration across reboots
- D. to permit the users from the IP addresses listed to make changes to the DHCP configuration

Answer: A

Question: 3

A network architect considers a Cisco HyperFlex design solution for a company. The proposed solution is for a virtual environment that is not performance sensitive, but the solution must have high storage capacity and a low cost. Which Cisco HyperFlex storage configuration should be used?

- A. All-Flash
- B. Hybrid
- C. All-SAN
- D. All-NVMe

Answer: B

Question: 4


What is a benefit of using the Cisco UCS Lightweight upgrade feature?

- A. The firmware version of a component is updated only when it has been modified.
- B. A soft reboot is available for the fabric interconnects.
- C. Security updates are scheduled with the next reboot of the fabric interconnects.
- D. All servers are rebooted to push the latest updates.

Answer: A

Question: 5

Refer to exhibit.

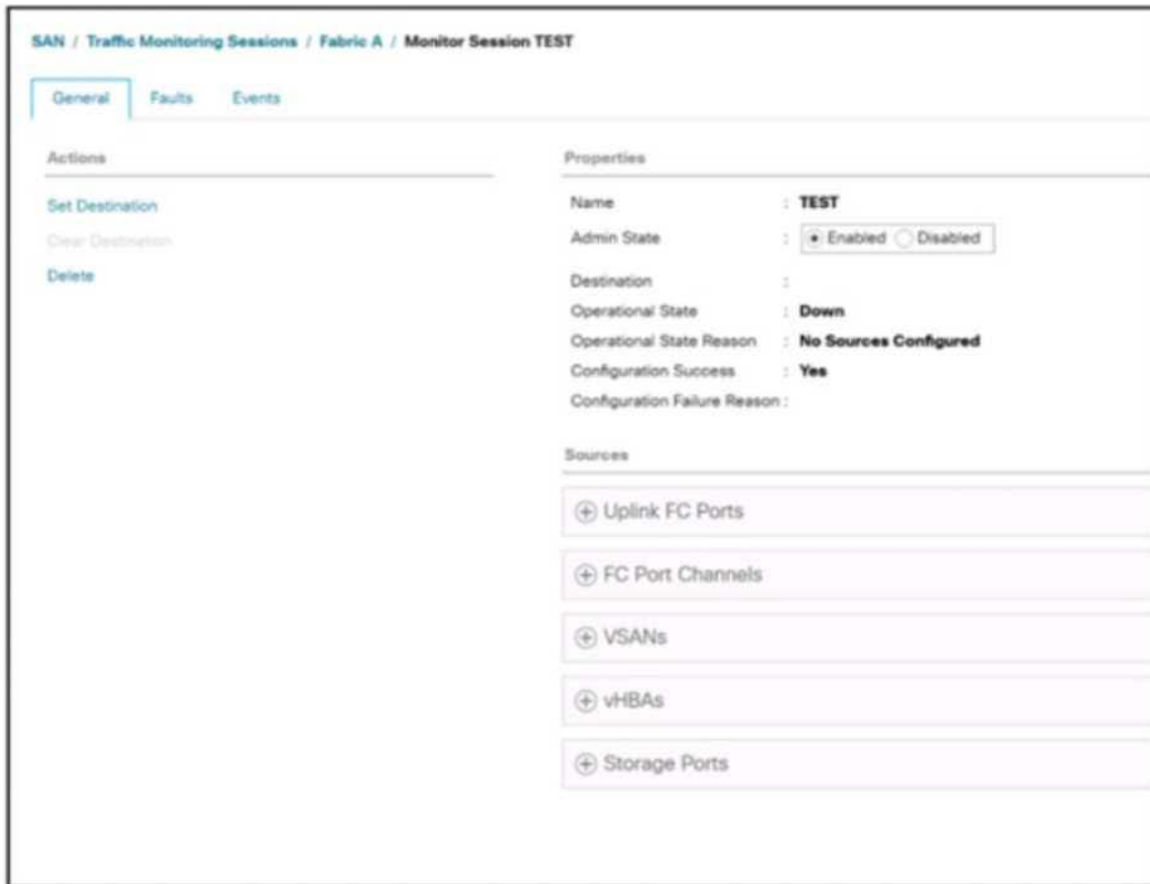

Refer to the exhibit. Users report SAN traffic packet loss on a blade server that is managed by using Cisco UCS Manager. An engineer must implement a SPAN feature to an external Fibre Channel analyzer. Which configuration source in the TEST monitoring session must the engineer select?

- A. all the storage ports
- B. all the virtual host bus adapters from the server
- C. all the uplink Fibre Channel ports
- D. all the VSANs from the server

Answer: C

Thank You for Trying Our Product

For More Information – **Visit link below:**

<https://www.examsboost.com/>

15 USD Discount Coupon Code:

G74JA8UF

FEATURES

- ✓ **90 Days Free Updates**
- ✓ **Money Back Pass Guarantee**
- ✓ **Instant Download or Email Attachment**
- ✓ **24/7 Live Chat Support**
- ✓ **PDF file could be used at any Platform**
- ✓ **50,000 Happy Customer**



Visit us at: <https://www.examsboost.com/test/350-601>